




ADJUSTABLE BALCONY MOUNTING BRACKET INSTALLATION MANUAL

Package Component List

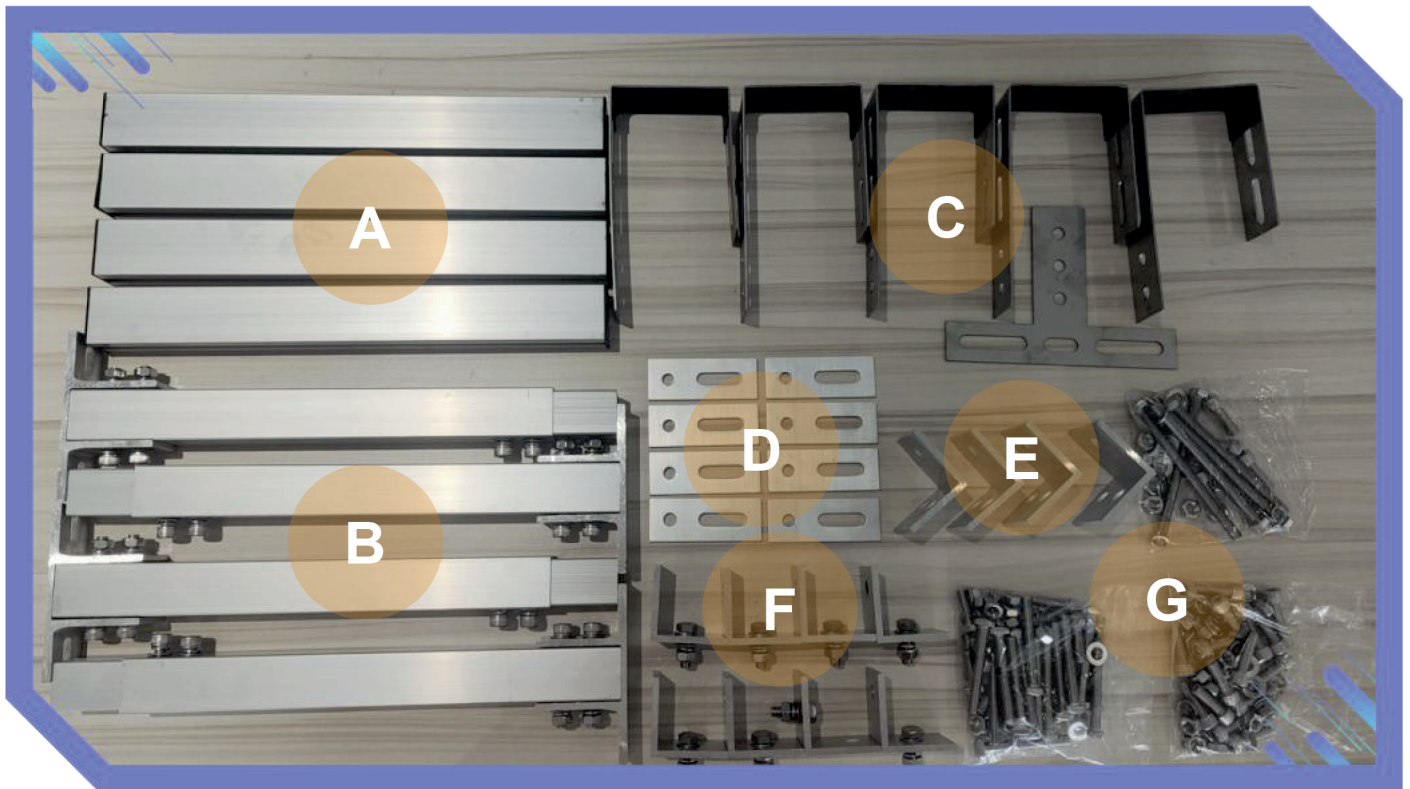

NOS.	ITEM	SPECIFICATIONS	QUANTITY
A	Horizontal Beam	40*30*1.2*350mm	4 Pcs
B	Adjustable Tilt Kit (Pre-Assembled)	Outer: 320mm Inner: 320mm	4 Pcs
C	Hooks Part	106*86*166*1.8*40mm	5 Pcs
		170*30*90*40*1.8mm	1 Pcs
D	Fixed Block	30*80*5mm	8 Pcs
E	L Connector 1	50*50*4.5*50mm	4 Pcs
F	L Connector 2 (With Bolt Set)	50*50*4.5*40mm	8 Pcs
G	Hardware Bag	Various	3 Bags

Hardware List


NOS.	ITEM	SPECIFICATIONS	QUANTITY
G.1	Hex Bolt	M8*110mm	5 Pcs
	Socket Bolt	M8*25mm	4 Pcs
	Flat Washer	M8	18 Pcs
	Spring Washer	M8	9 Pcs
	Nut	M8	9 Pcs
G.2	T Bolt	M8*60mm	16 Pcs
	T Bolt	M8*25mm	8 Pcs
	Flat Washer	M8	24 Pcs
	Spring Washer	M8	24 Pcs
	Nut	M8	24 Pcs
G.3	Socket Bolt	M8*25mm	12 Pcs
	Socket Bolt	M8*30mm	4 Pcs
	Flat Washer	M8	32 Pcs
	Spring Washer	M8	16 Pcs
	Nut	M8	16 Pcs

Hooks Assembling

Using the M8*25mm socket bolt set (including 2 flat washer, 1 spring washer and 1 nut) to connect the L Connector 1 (**Part E**) onto the hooks.

Using the M8*30 socket bolt set (including 2 flat washer, 1 spring washer and 1 nut) to connect the L Connector 2 (**Part F**) onto the L Connector 1 (**Part E**).

Using the M8*110mm hex bolt set (including 2 flat washer, 1 spring washer and 1 nut) to fasten it onto the balcony handrail.

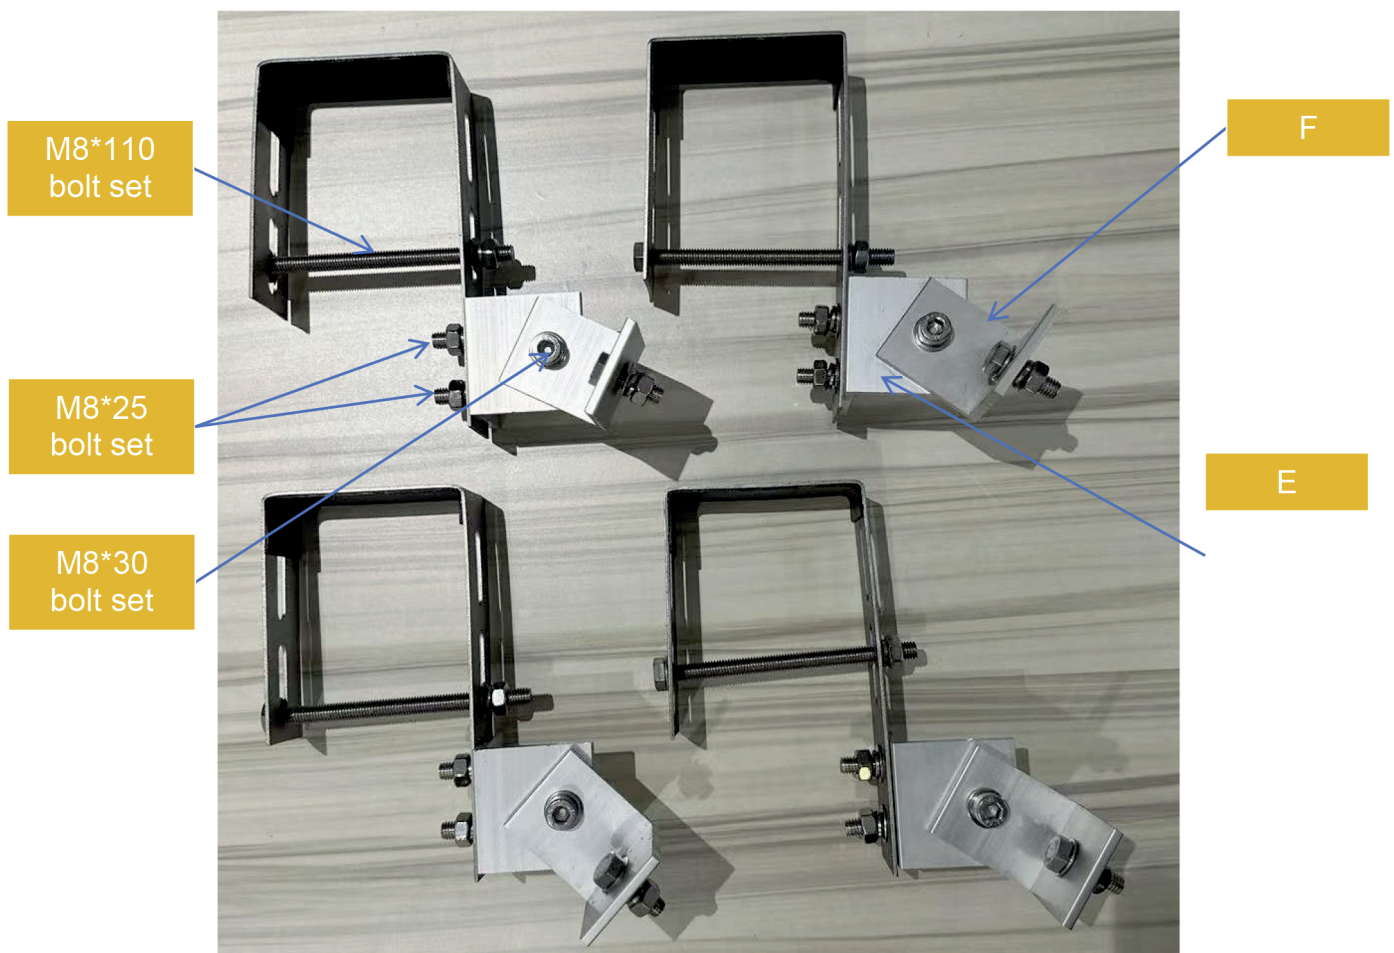


Micro Inverter Assembling

Using the M8*25mm socket bolt set (including 2 flat washer, 1 spring washer and 1 nut) to connect the hook and flat sheet.

Fasten the micro inverter onto the flat sheet by same M8*25mm socket bolt set (including 2 flat washer, 1 spring washer and 1 nut).

Using the M8*110mm hex bolt set (including 2 flat washer, 1 spring washer and 1 nut) to fasten it onto the balcony handrail.

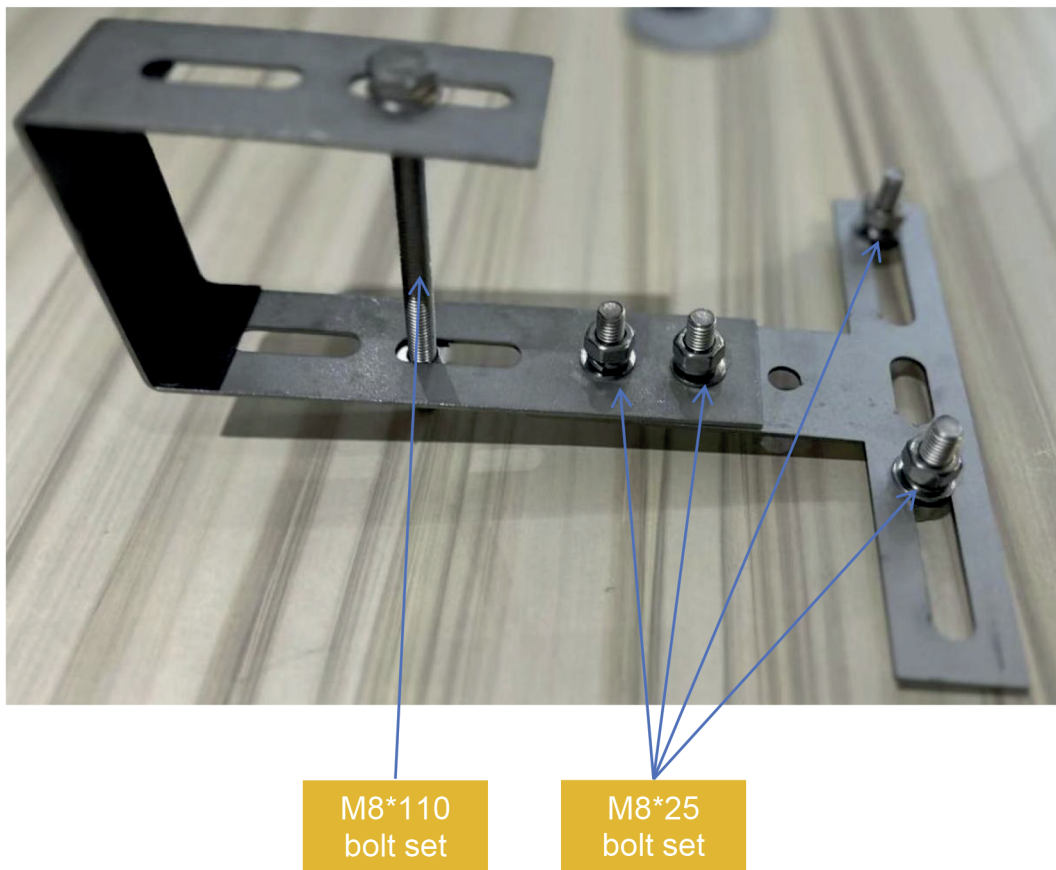

Adjustable Leg Assembling


Using the M8*25 socket bolt set (including 2 flat washer, 1 spring washer and 1 nut) to connect the L Connector 2 (**Part F**) onto adjustable tilt leg (**Part B**).

Using the M8*25 T bolt set (including 1 flat washer, 1 spring washer and 1 nut) to connect the adjustable leg (**Part B**) with the horizontal beam (**Part A**).



Horizontal Beam Assembling

Using the M8*60mm T bolt set (including 1 flat washer, 1 spring washer and 1 nut) to connect the fixed block (**Part D**) onto the horizontal beam (**Part A**). Another size is for connection with adjustable leg by M8*25 T bolt.

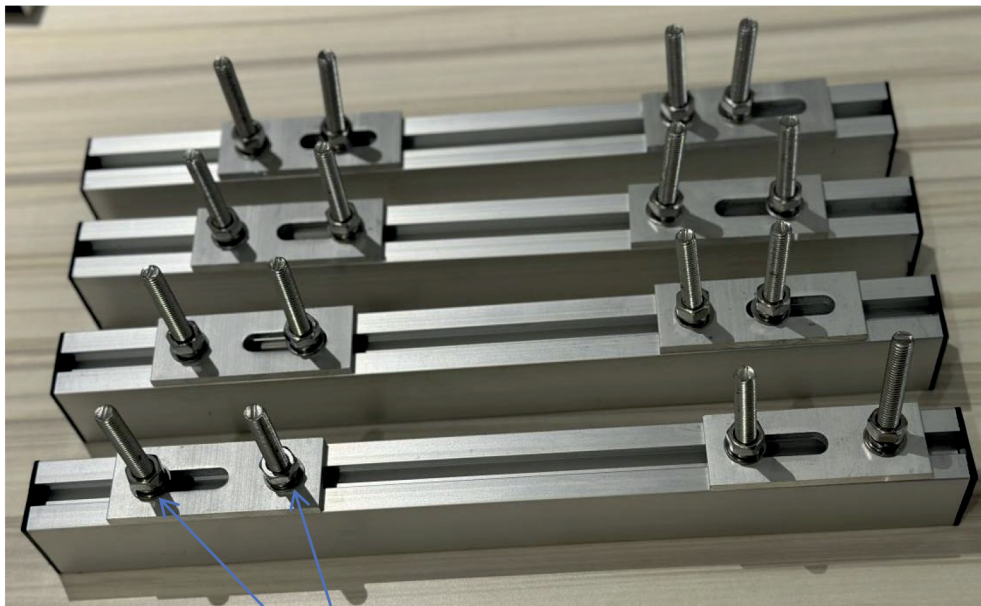

M8*60 T
bolt set